



Dell Inspiron 910 RAM Replacement

This guide will teach you how to remove the RAM from your laptop device.

Written By: Kyle Beekman



INTRODUCTION

Replacing or upgrading the Ram on a Dell Inspiron 910.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Remove Battery



- Turn the laptop over to where the battery is facing upwards and towards you.
- Locate the release tabs located on either sides of the battery.
- Push the release tabs toward the center of the device.
- Remove the battery.

Step 2 — Insert Replacement Battery



- Take the replacement battery and insert it into the laptop the same way the old battery was removed.
- Slide the release tabs back into place.

Step 3 — RAM



- Ensure that the laptop is shut.
- Flip the laptop over, so that you can see where the battery was taken out.

Step 4



- There should be a large black panel with slits visible, and two screws holding it in place.
- Using your Philips 0 screwdriver, unscrew both of the screws.

Step 5



- Now that the screws have been removed, you should be able to remove the panel. This may require some force.

Step 6




- After the panel has been removed, you should see two green circuit boards affixed to a larger blue circuit board.
- Don't worry about the one with wires attached, the RAM is the other circuit board.
- Look for the silver tabs on either side of the white plastic holding the RAM in place.
- Using your index fingers, lift both tabs. The RAM should partially "pop" out.

Step 7



- Gently pull the RAM out of the plastic.

Step 8

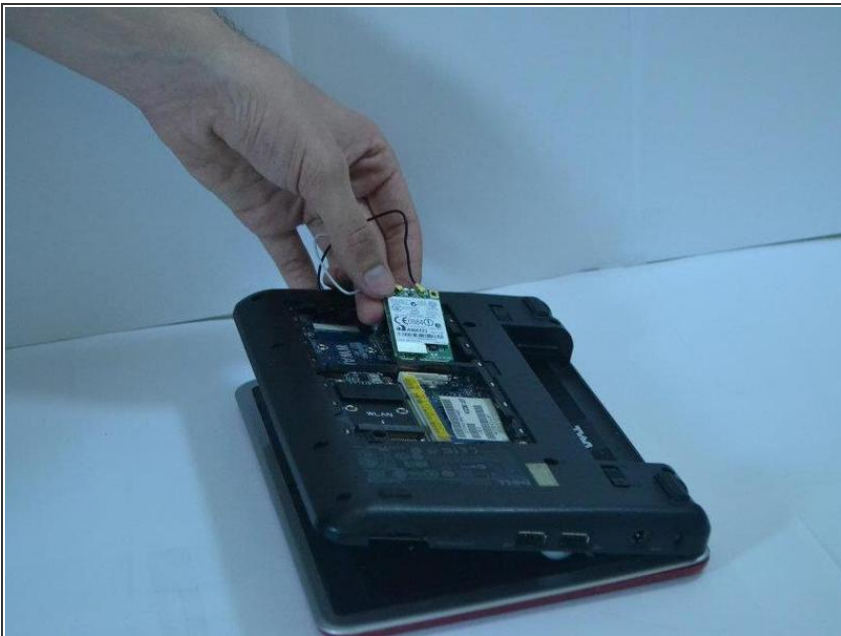

- To reinsert the RAM, or install new RAM, place it in the same position the removed RAM was in after lifting the tabs.

Step 9



- Depress the RAM until it locks into place; there should be an audible clicking noise when it does so.
- Press the RAM into the white plastic so that the gold tabs are barely visible.
- Congratulations! You have completed the guide.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-03 01:43:04 AM.